

RIFLESCOPES

NIGHT VISION

RED DOT SIGHTS

MAGNIFIERS

SIGHT  MARK[®]

BINOCULARS

SPOTTING SCOPES

LASER SIGHTS

BORESIGHTS

MAKE YOUR MARK

At Sightmark, we are committed to bringing your outdoor, hunting and shooting world into focus with world-class optic and firearm accessory solutions.

* All specs and availability are subject to change



About Us / Table of Contents	2
NEW FOR 2022	2-3
SIGHTMARK Reticles	4 - 5
WRAITH 4K Digital Riflescopes	6 - 7
WRAITH 4K Digital Monocular	8 - 9
WRAITH HD Digital Riflescopes	10 - 11
Influencer - TJ Branch	12 - 13
LATITUDE Riflescopes	14 - 15
PRESIDIO Riflescopes	16 - 17
CORE TX Riflescopes	18 - 19
CORE HX Riflescopes	20 - 21
RIFLESCOPE COMPARISON	22 - 23
ULTRA SHOT R-SPEC Sights	24 - 25
ULTRA SHOT A & M-SPEC Sights	26 - 27
MINI SHOT A-SPEC Sights	28 - 29
MINI SHOT M-SPEC Sights	30 - 31
CORE SHOT Sights	32 - 33
SOLAR SERIES Sights	34 - 35
WOLVERINE - MTS Sights	36 - 37
SIGHT COMPARISON	38 - 39
Influencer - Matt Banes	40 - 41
MAGNIFIERS	42 - 43
LATITUDE Spotting Scopes	44 - 45
SOLITUDE Spotting Scopes	46 - 47
SOLITUDE XD Binoculars	48 - 49
SOLITUDE Binoculars	50 - 51
LOPRO LASER/LIGHT Sights	52 - 53
ACCUDOT Laser Boresights	54 - 55
LASER Boresights	56 - 57
ACCESSORIES	58 - 59

NEW FOR 2022

PAGE: 18 - 19
MODEL: SM13142

- FEATURES:
- 6:1 ZOOM RATIO
 - CAPPED, LOW-PROFILE TURRETS
 - SECOND FOCAL PLANE RETICLE
 - RED ILLUMINATED RETICLE
 - FULLY MULTI-COATED OPTICS
 - SHOCKPROOF, FOGPROOF, WATERPROOF



RIFLESCOPE

PRESIDIO 5-30X56



DIGITAL DAY/NIGHT RIFLESCOPE

WRAITH 4K MINI 4-32X40

PAGE: 8 - 9
MODEL: SM18042

- FEATURES:
- 1 X 8 DIGITAL ZOOM
 - 4K IMAGING
 - IR ILLUMINATOR
 - FULL COLOR DAYTIME IMAGING
 - 2 NIGHT VISION MODES
 - VIDEO AND AUDIO RECORDING

PAGE: 18 - 19
MODEL: SM13141

- FEATURES:
- 6:1 ZOOM RATIO
 - CAPPED, LOW-PROFILE TURRETS
 - SECOND FOCAL PLANE RETICLE
 - ZERO STOP ELEVATION DIAL
 - RED ILLUMINATED RETICLE
 - FULLY MULTI-COATED OPTICS
 - SHOCKPROOF, FOGPROOF, WATERPROOF



RIFLESCOPE

PRESIDIO 3-18X50



DIGITAL DAY/NIGHT RIFLESCOPE

WRAITH 4K MINI 2-16X32

PAGE: 8 - 9
MODEL: SM18041

- FEATURES:
- 1 X 8 DIGITAL ZOOM
 - 4K IMAGING
 - IR ILLUMINATOR
 - FULL COLOR DAYTIME IMAGING
 - 2 NIGHT VISION MODES
 - VIDEO AND AUDIO RECORDING

PAGE: 18 - 19
MODEL: SM13140

- FEATURES:
- 6:1 ZOOM RATIO
 - CAPPED, LOW-PROFILE TURRETS
 - SECOND FOCAL PLANE RETICLE
 - RED ILLUMINATED RETICLE
 - FULLY MULTI-COATED OPTICS
 - SHOCKPROOF, FOGPROOF, WATERPROOF



RIFLESCOPE

PRESIDIO 1-6X24



DIGITAL DAY/NIGHT MONOCULAR

WRAITH 4K MONOCULAR

PAGE: 10 - 11
MODEL: SM18050

- FEATURES:
- 1 X 8 DIGITAL ZOOM
 - 4K IMAGING
 - HELMET MOUNTABLE
 - WEAPON MOUNTABLE
 - INTEGRATED IR ILLUMINATOR
 - FULL COLOR DAYTIME IMAGING
 - 2 NIGHT VISION MODES
 - VIDEO AND AUDIO RECORDING

PAGE: 58 - 59
MODEL: SM2600A

- FEATURES:
- POWERS ANY UNIT THAT USES A USB CABLE FOR CHARGING
 - TOOLLESS PICATINNY QD
 - 6,000 MAH
 - RECHARGEABLE LITHIUM-POLYMER
 - UNIVERSAL USB TYPE A



BATTERY PACK

QUICK DETACH MINI BATTERY PACK

PAGE: 32 - 33
MODEL: SM2600B

- FEATURES:
- RMR FOOTPRINT
 - AUTOMATIC BRIGHTNESS ADJUSTMENTS
 - DUAL POWER ABILITY
 - 20MM OBJECTIVE
 - SCRATCH RESISTANT LENS
 - ANTI-REFLECTIVE LENS COATING
 - UNLIMITED EYE RELIEF



REFLEX SIGHT

MINI SHOT M-SPEC M2- SOLAR

PAGE: 32 - 33
MODEL: SM2600C

- FEATURES:
- RMR-C FOOTPRINT
 - AUTO BRIGHTNESS ADJUSTMENTS
 - DUAL POWER ABILITY
 - 20MM OBJECTIVE
 - SCRATCH RESISTANT LENS
 - ANTI-REFLECTIVE LENS COATING
 - UNLIMITED EYE RELIEF



REFLEX SIGHT

MINI SHOT M-SPEC M3- SOLAR

WRAITH 4K MINI RIFLESCOPES pg 22-23

RETICLE: WRAITH 4K MINI - 4X MODEL
MEASUREMENTS: MOA/MRAD
RETICLE COLORS: ●●●●●●●●

FIRST FOCAL PLANE RETICLES

SECOND FOCAL PLANE RETICLES

RETICLE: WRAITH 4K MINI - 2X MODEL
MEASUREMENTS: MOA/MRAD
RETICLE COLORS: ●●●●●●●●

FIRST FOCAL PLANE RETICLES

SECOND FOCAL PLANE RETICLES

WRAITH HD RIFLESCOPES pg 22-25

RETICLE: WRAITH HD - 4X MODELS
MEASUREMENTS: MOA/MRAD
RETICLE COLORS: ●●●●●●●●

SECOND FOCAL PLANE RETICLES

RETICLE: WRAITH HD - 2X MODELS
MEASUREMENTS: MOA/MRAD
RETICLE COLORS: ●●●●●●●●

SECOND FOCAL PLANE RETICLES

LATITUDE RIFLESCOPES pg 12-13

RETICLE: PRS
LINE THICKNESS: 0.03 MRAD
MEASUREMENTS: MRAD
RETICLE COLORS: ●●●

RETICLE: BENCHREST
LINE THICKNESS: 0.01 MOA
MEASUREMENTS: MOA
RETICLE COLORS: ●●●

RETICLE: F-CLASS
LINE THICKNESS: 0.02 MOA
MEASUREMENTS: MOA
RETICLE COLORS: ●●●

LATITUDE SPOTTING SCOPES pg 44-45

RETICLE: LATITUDE 80 - TACTICAL
LINE THICKNESS: 0.03 MRAD
MEASUREMENTS: MRAD

RETICLE: LATITUDE 60 - TACTICAL
LINE THICKNESS: 0.15 MRAD
MEASUREMENTS: MRAD

PRESIDIO RIFLESCOPES pg 14-15

RETICLE: LR2
LINE THICKNESS: 0.03 MRAD
MEASUREMENTS: MRAD
RETICLE COLORS: ●●

RETICLE: MR2
LINE THICKNESS: 0.03 MRAD
MEASUREMENTS: MRAD
RETICLE COLORS: ●●

RETICLE: CR1
MEASUREMENTS: BDC/MOA
CALIBER: .223-55GR FMJ
RETICLE COLORS: ●●

RETICLE: HDR 1-6
MEASUREMENTS: DUPLEX
RETICLE COLORS: ●●

RETICLE: HDR2 1-6
MEASUREMENTS: DUPLEX
RETICLE COLORS: ●●

CORE HX RIFLESCOPES pg 18-19

RETICLE: HUNTER DUT
MEASUREMENTS: BDC
CALIBER: WHITETAIL
RETICLE COLORS: ●●

RETICLE: VENSON HUNTER
MEASUREMENTS: BDC
CALIBER: WHITETAIL
RETICLE COLORS: ●●

RETICLE: VENSON HUNTER
MEASUREMENTS: BDC
CALIBER: 350 LEGEND
450 BUSHMASTER
RETICLE COLORS: ●●

RETICLE: HUNTER BALLISTIC
MEASUREMENTS: BDC
CALIBER: WHITETAIL
RETICLE COLORS: ●●

RETICLE: HDG HUNTER
MEASUREMENTS: NOSE TO TAIL
RANGEFINDING: YARDS
RETICLE COLORS: ●●

CORE TX RIFLESCOPES pg 16-17

RETICLE: MARKSMAN
LINE THICKNESS: 0.12 MOA
MEASUREMENTS: MOA
RETICLE COLORS: ●●●

RETICLE: DUAL CALIBER
MEASUREMENTS: BDC
CALIBER: .223-55/62GR
& .308-150/155GR
RETICLE COLORS: ●●●

RETICLE: AR-223
MEASUREMENTS: BDC/MOA
CALIBER: .223-55GR FMJ
RETICLE COLORS: ●●●

ULTRA SHOT REFLEX SIGHTS pg 28-31

RETICLE: R-SPEC / MULTIPLE
LINE THICKNESS: 2 MOA
RETICLE COLORS: ●●●

RETICLE: A-SPEC / MULTIPLE
LINE THICKNESS: 2 MOA
RETICLE COLORS: ●●●

RETICLE: M-SPEC / CIRCLE DOT CROSSHAIR
LINE THICKNESS: 2 MOA
RETICLE COLORS: ●●●

WRAITH 4K MINI

Few riflescopes possess the staggering features of the Wraith 4K Mini Family. Their 4K (3840x2160) CMOS sensor provides the clearest digital night vision imaging—and greatest detection range—of any commercially-available riflescopes. Technologically, Wraith 4K Minis dwarf the competition: Built-in videorecording, variable digital zoom and full-color, HD imaging on a flawless 1280x720 FLCOS screen. For its space-saving size and incredible price-point, the Wraith 4K Mini is amongst the finest riflescopes in the world today.

DIGITAL DAY/NIGHT RIFLESCOPES

.308
MAXIMUM CALIBER

FULL COLOR HD DISPLAY

ON-BOARD RECORDING

EASY ACCESS BATTERIES

DAY OR NIGHT OPERATION

INCLUDES:
FLIP-UP LENS COVERS
RUBBER EYE CUP
DETACHABLE IR ILLUMINATOR




WRAITH 4K MINI 4-32X40

MAGNIFICATION	OBJECTIVE LENS	CAMERA RESOLUTION	FRAME RATE	MOUNT TYPE	ILLUMINATOR TYPE	NV DETECTION RANGE	DIMENSIONS	WEIGHT	BATTERY
4x Optical 1-8x Digital	40	3840 x 2160 with Recording	Up to 60 fps (Interpolated)	Picatinny Fixed	IR 850nm LED Mountable	up to 300 yds up to 274 m	6.53 x 3.03 in 166 x 77 mm	37.6 oz 1066 g	2x CR123A up to 4.4 hrs



INCLUDES SEPARATE PICATINNY MOUNTABLE IR ILLUMINATOR

RETICLE: 14-PATTERN MIL/MOA
1280 X 720 FLCOS DISPLAY
COLOR:
MODEL: SM18042

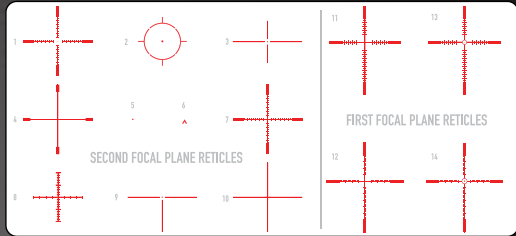


WRAITH 4K MINI 2-16X32

MAGNIFICATION	OBJECTIVE LENS	CAMERA RESOLUTION	FRAME RATE	MOUNT TYPE	ILLUMINATOR TYPE	NV DETECTION RANGE	DIMENSIONS	WEIGHT	BATTERY
2x Optical 1-8x Digital	32 mm	3840 x 2160 with Recording	Up to 60 fps (Interpolated)	Picatinny Fixed	IR 850nm LED Mountable	up to 300 yds up to 274 m	6.3 x 3.03 in 160 x 77 mm	21.6 oz 612 g	2x CR123A up to 4.4 hrs



INCLUDES SEPARATE PICATINNY MOUNTABLE IR ILLUMINATOR

RETICLE: 14-PATTERN MIL/MOA
1280 X 720 FLCOS DISPLAY
COLOR:
MODEL: SM18041

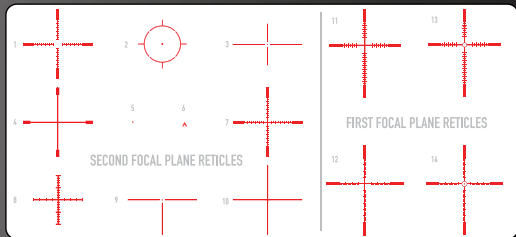

WRAITH MINI LONG ACTION MOUNT

WORKS WITH	RIFLE TYPE	TORQUE SPEC HEX	TORQUE SPEC RINGS	MATERIAL
Wraith 4K Mini models	Bolt Action - Multiple Positions	30 - 40 in-lb 3.4 - 4.5 N.m	30 - 40 in-lb 3.4 - 4.5 N.m	6061-T6 Aluminum

INCLUDES 45 DEGREE PICATINNY MOUNT OPTION



MOUNT: PICATINNY FIXED
MODEL: SM18041.01

WRAITH 4K MONOCULAR

Sightmark's Wraith 4K Monocular is an optic with multi-mounting versatility. Evolved from the Wraith 4K Mini, this helmet-, handheld- or rifle-mounted optic provides users with a digital night vision optic that is technologically advanced and potentially hands-free. With 1-8x digital zoom, video-recording capabilities and a sleek polymer housing, this optic represents the future of digital night vision. Its auto-adjusting, integrated IR light is ideal for various environmental conditions, and its easy mounting & dismounting make the Wraith 4K Monocular a must-have for Sightmark customers!

DIGITAL DAY/NIGHT MONOCULAR

.308
MAXIMUM CALIBER

HELMET MOUNTABLE

ON-BOARD RECORDING

BUILT-IN IR LIGHT

4K DIGITAL IMAGING

WEAPON MOUNTABLE



FLIP-UP LENS COVERS
RUBBER EYE CUP



HANDHELD OPTION



FIREARM MOUNT OPTION



HELMET MOUNT OPTION



WRAITH 4K MONOCULAR

MAGNIFICATION	OBJECTIVE LENS	CAMERA RESOLUTION	FRAME RATE	MOUNT TYPE	ILLUMINATOR TYPE	NV DETECTION RANGE	DIMENSIONS	WEIGHT	BATTERY
1x	17 mm	3840 x 2160 with Recording	Up to 180 fps @ 720p	NCG Mount And Picatinny	Integrated / Automatic	200 yds 183 m	5.15 x 2.75 in 131 x 70 mm	13 oz 340 g	2x CR123A up to 4.4 hrs



1280 X 720 FLCOS DISPLAY
MODEL: 0410050

WRAITH HD

DIGITAL DAY/NIGHT RIFLESCOPES

Sightmark digital night vision devices unlock the mysteries of the night with premium light-gathering technology, digital processing, high-resolution displays and advanced sensors compatible with safe daytime operation, turning your pursuits into 24-hour opportunities.



MAXIMUM CALIBER



DETACHABLE IR ILLUMINATOR




REMOVES LENS COVER



WRAITH HD 4-32X50


MAGNIFICATION	OBJECTIVE LENS	CAMERA RESOLUTION	FRAME RATE	MOUNT TYPE	ILLUMINATOR TYPE	NV DETECTION RANGE	DIMENSIONS	WEIGHT	BATTERY
4x Optical 1-8x Digital	50 mm	1920 x 1080 with Recording	Up to 60 fps (Interpolated)	Picatinny Fixed	IR 850nm LED Adjustable	up to 200 yds up to 183 m	10.5 x 3 in 266 x 75 mm	36.3 oz 1029 g	4x aa up to 4.5 hrs

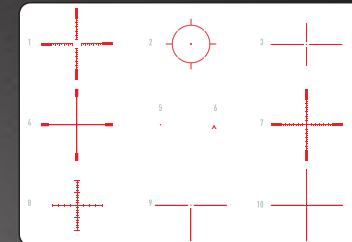

RETICLE: 10-PATTERN
MIL/MOA
1280 X 720 FLCOS DISPLAY
COLOR:
MODEL: SM18011

WRAITH HD 2-16X28

MAGNIFICATION	OBJECTIVE LENS	CAMERA RESOLUTION	FRAME RATE	MOUNT TYPE	ILLUMINATOR TYPE	NV DETECTION RANGE	DIMENSIONS	WEIGHT	BATTERY
2x Optical 1-8x Digital	28 mm	1920 x 1080 with Recording	Up to 60 fps (Interpolated)	Picatinny Fixed	IR 850nm LED Adjustable	up to 200 yds up to 183 m	10 x 2.6 in 255 x 65.5 mm	33.6 oz 952 g	4x aa up to 4.5 hrs

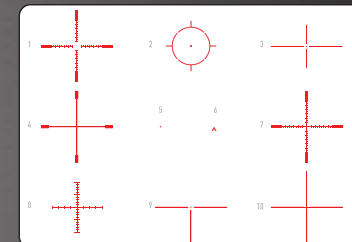

RETICLE: 10-PATTERN
MIL/MOA
1280 X 720 FLCOS DISPLAY
COLOR:
MODEL: SM18021



MOUNT: PICATINNY FIXED
MODEL: SM18011.01

WRAITH LONG ACTION MOUNT

WORKS WITH	RIFLE TYPE	TORQUE SPEC HEX	TORQUE SPEC RINGS	MATERIAL
Wraith HD and Wraith 4K models	Bolt Action - Multiple Positions	30 - 40 in-lb 3.4 - 4.5 N.m	30 - 40 in-lb 3.4 - 4.5 N.m	6061-T6 Aluminum



TJ BRANCH

TJ Branch is a classic, born-and-bred American hunter. Raised in rural South Carolina, he harvested his first deer at age eight and has been ‘hooked’ on hunting ever since! Guided by veteran hunters, TJ quickly developed into a quintessential outdoorsman, learning valuable lessons about wildlife, firearms and the importance of responsible conservation.

As a young man, TJ spent untold hours on Mills Scoggins farm, absorbing precious knowledge about gunsmithing, livestock management and the importance of the hunting legacy. TJ learned first-hand about the dangers of invasive species—especially feral hogs—and he’s immensely experienced in hunting, trapping and reducing the wild pig populations that ravage farms across the U.S.

TJ loves building, fixing, sighting and firing guns. He has become a local legend in his hometown, able to diagnose and fix virtually any firearm-related issue that comes across his workbench. As a Second Amendment advocate, TJ preaches responsible firearm usage, and he’s not shy about sharing his knowledge with anyone who asks!

TJ primarily uses Sightmark Wraiths on his various rifles. He loves the versatility offered by digital night vision, and he states, “I wouldn’t change anything about these products. At least 20 of my close friends have started using Wraiths on my recommendation, and I haven’t heard a single negative comment from them. Not one.”

Whether he’s filling up his freezer for the winter or helping local farmers protect their livelihoods, TJ trusts Sightmark to get the job done, and he’s confident Sightmark can help you Make Your Mark.



LATITUDE

RIFLESCOPES

When it comes to precision shooting, Latitude riflescopes deliver premium optic performance. From high-stakes one-shot opportunities and dynamic PRS challenges and slow-fire, extended-distance shooting, Latitude Riflescopes deliver big on best-in-class precision rifle scope features including first- and second-focal-plane reticles, MOA and MRAD options, illuminated reticles, adjustable parallax and diopters, external zero-stops, 34 mm tube platforms and our lifetime warranty.



ROBUST MAGNIFICATION RANGE

OVERSIZED, HIGH-PROFILE TURRETS

34 MM TUBE

UP TO 60MM OBJECTIVE LENS




INCLUDES: SUN SHADE




LATITUDE 6.25-25X56

MAGNIFICATION X OBJECTIVE LENS	TUBE DIAMETER	EYE RELIEF	FIELD OF VIEW @100 YDS/M	PARALLAX SETTING	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
6.25-25 x 56 mm	34 mm	4.7 - 4.2 in 120 - 107 mm	16.1 - 4 ft 4.9 - 1.2 m	20 yds - ∞ 18 m - ∞	1/4 moa .1 mil	70 moa / 110 moa 20 mil / 31 mil	13.77 x 2.95 in 350 x 75 mm	33.1 oz 938.4 g	CR2032




RETICLE: F-CLASS MOA 2ND FOCAL PLANE
COLOR: ● ● ●
MODEL: SM13042FTR

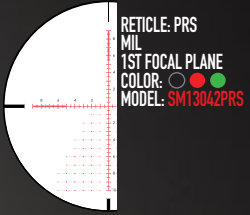

RETICLE: PRS MIL 1ST FOCAL PLANE
COLOR: ● ● ●
MODEL: SM13042PRS

LATITUDE 8-32X60


MAGNIFICATION X OBJECTIVE LENS	TUBE DIAMETER	EYE RELIEF	FIELD OF VIEW @100 YDS/M	PARALLAX SETTING	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
8-32 x 60 mm	34 mm	4.7 - 4.2 in 120 - 107 mm	12.4 - 4.3 ft 4 - 1 m	20 yds - ∞ 18 m - ∞	1/8 moa	70 moa / 110 moa	14.05 x 2.95 in 357 x 75 mm	36.2 oz 1026.3 g	CR2032




RETICLE: F-CLASS MOA 2ND FOCAL PLANE
COLOR: ● ● ●
MODEL: SM13043FTR

LATITUDE 10-40X60

MAGNIFICATION X OBJECTIVE LENS	TUBE DIAMETER	EYE RELIEF	FIELD OF VIEW @100 YDS/M	PARALLAX SETTING	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
10-40 x 60 mm	34 mm	4.1 - 3.8 in 104 - 96.5 mm	10 - 2.5 ft 3.04 - 0.76 m	20 yds - ∞ 18 m - ∞	1/8 moa	70 moa / 110 moa	14.05 x 2.95 in 357 x 75 mm	36.2 oz 1026.3 g	CR2032



RETICLE: F-CLASS MOA 2ND FOCAL PLANE
COLOR: ● ● ●
MODEL: SM13044FTR

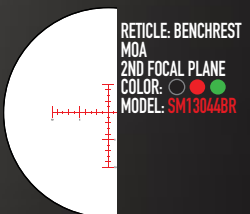

RETICLE: BENCHREST MOA 2ND FOCAL PLANE
COLOR: ● ● ●
MODEL: SM13044BR

PRESIDIO

RIFLESCOPES

Sightmark's Presidio Rifle Scope Family brings class and integrity to the world of shooting optics. Ideal for medium- and long-range shooting, Presidios utilize crystal-clear, illuminated reticles to give shooters unparalleled accuracy. Tactically designed, their simple attachment levers, zero stop turrets and beaded grip make Presidios the straightforward scopes of choice for shooters of all levels.



MAXIMUM CALIBER

FAST-FOCUS EYEPIECE

ZERO STOP TURRETS

30MM TUBE

FIRST OR SECOND FOCAL PLANE

INCLUDED
THROW LEVER
FLIP-UP LENS COVERS (1-6X, 1-10X)



PRESIDIO 5-30X56

MAGNIFICATION X OBJECTIVE LENS	TUBE DIAMETER	EYE RELIEF	FIELD OF VIEW @100 YDS/M	PARALLAX SETTING	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
5-30 x 56 mm	30 mm	3.74 in 95 mm	22 - 3.7 ft 6.7 - 1.1 m	20 yds - ∞ 18 m - ∞	.1 mil 1/4 moa	26 mil / 26 mil 80 moa / 80 moa	15.67 x 3.79 in 398 x 96 mm	33 oz 935.5 g	CR2032




PRESIDIO 3-18X50

MAGNIFICATION X OBJECTIVE LENS	TUBE DIAMETER	EYE RELIEF	FIELD OF VIEW @100 YDS/M	PARALLAX SETTING	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
3-18 x 50 mm	30 mm	3.8 in 98.5 mm	36.7 - 6.1 ft 11.19 - 1.86 m	15 yds - ∞ 13.72 m - ∞	.1 mil	26 mil / 26 mil	13 x 3.74 in 331 x 95 mm	30.8 oz 873 g	CR2032



PRESIDIO 1-6X24


MAGNIFICATION X OBJECTIVE LENS	TUBE DIAMETER	EYE RELIEF	FIELD OF VIEW @100 YDS/M	PARALLAX SETTING	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
1-6 x 24 mm	30 mm	2.83 - 3.35 in 72 - 85mm	111 - 18.33 ft 33.9 - 5.6 m	100 yds 91 m	1/2 moa	170 moa / 250 moa	10.5 x 2.4 in 266.4 x 61 mm	18 oz 510 g	CR2032




RETICLE: LR2
MIL
1ST FOCAL PLANE
COLOR: ●
MODEL: SM13142LR2




RETICLE: HDR2
MOA
2ND FOCAL PLANE
COLOR: ●
MODEL: SM13142HDR2




RETICLE: LR2
MIL
1ST FOCAL PLANE
COLOR: ●
MODEL: SM13141LR2



RETICLE: MR2
MIL
1ST FOCAL PLANE
COLOR: ●
MODEL: SM13141MR2



RETICLE: CR1
MOA
2ND FOCAL PLANE
COLOR: ●
MODEL: SM13140CR1



RETICLE: HDR
MOA
2ND FOCAL PLANE
COLOR: ●
MODEL: SM13140HDR

CORE TX

RIFLESCOPES

Specifically designed for precision performance in anything from tough CQB to long-range tactical environments, Core TX riflescopes promise a lifetime of shockproof, fogproof, dustproof and waterproof reliability.



MAXIMUM CALIBER

EXPOSED LOCKING TURRETS

30MM TUBES

ETCHED GLASS, ILLUMINATED RETICLES




INCLUDES STARTER RINGS FLIP-UP LENS COVERS



CORE TX 8.5-25X50

MAGNIFICATION X OBJECTIVE LENS	TUBE DIAMETER	EYE RELIEF	FIELD OF VIEW @100 YDS/M	PARALLAX SETTING	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
8.5-25 x 50 mm	30 mm	4 - 3.7 in 102 - 94 mm	12.7 - 4.2 ft 4.2 - 1.4 m	10 yds - ∞ 9 m - ∞	1/8 moa	40 moa / 40 moa	14.1 x 2.5 in 358 x 63.5 mm	29 oz 822 g	CR2032




RETICLE: MARKSMAN
MOA
2ND FOCAL PLANE
COLOR: ●●●
MODEL: SM13076MR



CORE TX 4-16X44

MAGNIFICATION X OBJECTIVE LENS	TUBE DIAMETER	EYE RELIEF	FIELD OF VIEW @100 YDS/M	PARALLAX SETTING	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
4-16 x 44 mm	30 mm	4 - 3.7 in 102 - 94 mm	24.6 - 6.3 ft 8.2 - 2.1 m	20 yds - ∞ 18 m - ∞	1/4 moa	50 moa / 50 moa	13.7 x 2.5 in 350 x 63 mm	24 oz 680 g	CR2032




RETICLE: MARKSMAN
MOA
2ND FOCAL PLANE
COLOR: ●●●
MODEL: SM13075MR



CORE TX 1-4X24

MAGNIFICATION X OBJECTIVE LENS	TUBE DIAMETER	EYE RELIEF	FIELD OF VIEW @100 YDS/M	PARALLAX SETTING	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
1-4 x 24 mm	30 mm	4 - 3.7 in 102 - 94 mm	96.1 - 24.1 ft 32 - 8 m	100 yds 91 m	1/2 moa	80 moa / 80 moa	9.64 x 2.5 in 245 x 63.5 mm	17 oz 482 g	CR2032




RETICLE: DUAL CALIBER
MOA
2ND FOCAL PLANE
COLOR: ●●●
MODEL: SM130720CR



CORE TX 1-4X24

MAGNIFICATION X OBJECTIVE LENS	TUBE DIAMETER	EYE RELIEF	FIELD OF VIEW @100 YDS/M	PARALLAX SETTING	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
1-4 x 24 mm	30 mm	4 - 3.7 in 102 - 94 mm	102.5 - 25 ft 32 - 8 m	100 yds 91 m	1/2 moa	120 moa / 120 moa	9.64 x 2 in 245 x 50.8 mm	16.2 oz 459 g	CR2032



RETICLE: AR-223
MOA
2ND FOCAL PLANE
COLOR: ●●●
MODEL: SM13082AR.223

CORE HX

Designed by hunters for hunters, Core HX riflescopes combine razor-sharp clarity, precise tracking and illuminated reticles to enhance accuracy and leverage success at the moment of truth.

RIFLESCOPES



RETICLES DESIGNED FOR HUNTING

CAPPED TURRETS

MULTI-COATED OPTICS




INCLUDES STARTER RINGS SCOPE COVER



CORE HX 3-12X56

MAGNIFICATION X OBJECTIVE LENS	TUBE DIAMETER	EYE RELIEF	FIELD OF VIEW @100 YDS/M	PARALLAX SETTING	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
3-12 x 56 mm	30 mm	4.3 - 3.8 in 109 - 96.5 mm	35.5 - 8.8 ft 11.8 - 2.9 m	20 yds - ∞ 18 m - ∞	1/4 moa	60 moa / 60 moa	12.7 x 2.6 in 323 x 65 mm	25 oz 708.7 g	CR2032




RETICLE: HUNTER DOT
MOA
2ND FOCAL PLANE
COLOR:
MODEL: SM1308BHDR



CORE HX 4-16X44 AO

MAGNIFICATION X OBJECTIVE LENS	TUBE DIAMETER	EYE RELIEF	FIELD OF VIEW @100 YDS/M	PARALLAX SETTING	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
4-16 x 44 mm	1 in 25.4 mm	4.3 - 3.8 in 109 - 96.5 mm	24.8 - 6.2 ft 8.3 - 2.1 m	10 yds - ∞ 9 m - ∞	1/4 moa	50 moa / 50 moa	14.3 x 1.87 in 363 x 47.5 mm	16.2 oz 459 g	




RETICLE: VENISON HUNTER
MOA
2ND FOCAL PLANE
COLOR:
MODEL: SM13069VHR




CORE HX 3-9X40


MAGNIFICATION X OBJECTIVE LENS	TUBE DIAMETER	EYE RELIEF	FIELD OF VIEW @100 YDS/M	PARALLAX SETTING	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
3-9 x 40 mm	1 in 25.4 mm	4 - 3.7 in 101 - 94 mm	35.4 - 12.2 ft 11.8 - 4.1 m	100 yds 91 m	1/4 moa	70 moa / 70 moa	12.26 x 1.87 in 311.4 x 47.5 mm	14.2 oz 402.5 g	

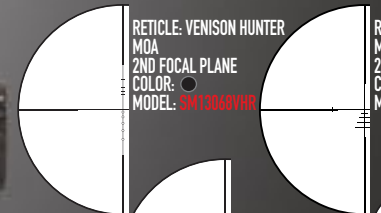

RETICLE: VENISON HUNTER
MOA
2ND FOCAL PLANE
COLOR:
MODEL: SM13069VHR



RETICLE: HUNTER BALLISTIC
MOA
2ND FOCAL PLANE
COLOR:
MODEL: SM13068HBR



RETICLE: VENISON HUNTER 350 LEGEND
MOA
2ND FOCAL PLANE
COLOR:
MODEL: SM1306BVHR-350L



RETICLE: VENISON HUNTER 450 BUSHMASTER
MOA
2ND FOCAL PLANE
COLOR:
MODEL: SM1306BVHR-450BM



SERIES	LATITUDE					PRESIDIO						CORE TX				CORE HX						
MODEL #	SM13042PRS	SM13042FTR	SM13043FTR	SM13044BR	SM13044FTR	SM13142LR2	SM13142HDR2	SM13141LR2	SM13141MR2	SM13140CR1	SM13140HDR	SM13076MR	SM13075MR	SM13072DCR	SM13082AR.223	SM13080HDR	SM13069VHR	SM13068VHR	SM13068VHR-350L	SM13068VHR-450BM	SM13068HBR	SM13067HHR
MAGNIFICATION	6.25 - 25X	6.25 - 25X	8 - 32X	10 - 40X	10 - 40X	5 - 30X	5 - 30X	3 - 18X	3 - 18X	1 - 6X	1 - 6X	8.5 - 25X	4 - 16X	1 - 4X	1 - 4X	3 - 12X	4 - 16X	3 - 9X	3 - 9X	3 - 9X	3 - 9X	2 - 7X
OBJECTIVE LENS DIAMETER	56 mm	56 mm	60 mm	60 mm	60 mm	56 mm	56 mm	50 mm	50 mm	24 mm	24 mm	50 mm	44 mm	24 mm	24 mm	56 mm	44 mm	40 mm	40 mm	40 mm	40 mm	32 mm
EYE RELIEF	4.7-4.2in / 120-107mm	4.7-4.2in / 120-107mm	4.7-4.2in / 120-107mm	4.1-3.8in / 104-96.5mm	4.1-3.8in / 104-96.5mm	3.74in / 95mm	3.74in / 95mm	3.8in / 98.5mm	3.8in / 98.5mm	2.83-3.35in / 72-85mm	2.83-3.35in / 72-85mm	4-3.7in / 102-94mm	4-3.7in / 102-94mm	4-3.7in / 102-94mm	4-3.7in / 102-94mm	4.3-3.8in / 109-96.5mm	4.3-3.8in / 109-96.5mm	4-3.7in / 101-94mm	4-3.7in / 101-94mm	4-3.7in / 101-94mm	4-3.7in / 101-94mm	4.7-4in / 119-101.6mm
FIELD OF VIEW@ 100 YDS/M	16.1-4ft / 4.9-1.2m	16.1-4ft / 4.9-1.2m	12.4-4.3ft / 4-1m	10-2.5ft / 3.04-0.76m	10-2.5ft / 3.04-0.76m	22-3.7ft / 6.7-1.1m	22-3.7ft / 6.7-1.1m	36.7-6.1ft / 11.2-1.86m	36.7-6.1ft / 11.2-1.86m	111-18.3ft / 33.9-5.6m	111-18.3ft / 33.9-5.6m	12.7-4.2ft / 4.2-1.4m	24.6-6.3ft / 8.2-2.1m	96.1-24.1ft / 32-8m	102.5-25ft / 32-8m	35.5-8.8ft / 11.8-2.9m	24.8-6.2ft / 8.3-2.1m	35.4-12.2ft / 11.8-4.1m	35.4-12.2ft / 11.8-4.1m	35.4-12.2ft / 11.8-4.1m	35.4-12.2ft / 11.8-4.1m	54.4-14.4ft / 18.1-4.8m
TUBE DIAMETER	34 mm	34 mm	34 mm	34 mm	34 mm	30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	30 mm	1 in / 25.4 mm	1 in / 25.4 mm	1 in / 25.4 mm	1 in / 25.4 mm	1 in / 25.4 mm	1 in / 25.4 mm
PARALLAX SETTING	20 yds - ∞ / 18 m - ∞	20 yds - ∞ / 18 m - ∞	20 yds - ∞ / 18 m - ∞	20 yds - ∞ / 18 m - ∞	20 yds - ∞ / 18 m - ∞	20 yds - ∞ / 18 m - ∞	20 yds - ∞ / 18 m - ∞	15 yds - ∞ / 14 m - ∞	15 yds - ∞ / 14 m - ∞	100 yds / 91 m	100 yds / 91 m	10 yds - ∞ / 9 m - ∞	20 yds - ∞ / 18 m - ∞	100 yds / 91 m	100 yds / 91 m	20 yds - ∞ / 18 m - ∞	10 yds - ∞ / 9 m - ∞	100 yds / 91 m	100 yds / 91 m	100 yds / 91 m	100 yds / 91 m	100 yds / 91 m
ADJUSTMENT VALUE	0.1 mil	1/4 moa	1/8 moa	1/8 moa	1/8 moa	0.1 mil	1/4 moa	0.1 mil	0.1 mil	1/2 moa	1/2 moa	1/8 moa	1/4 moa	1/2 moa	1/2 moa	1/4 moa	1/4 moa	1/4 moa	1/4 moa	1/4 moa	1/4 moa	1/4 moa
WINDAGE ADJUSTMENT	20 mil	70 moa	70 moa	70 moa	70 moa	26 mil	80 moa	26 mil	26 mil	170 moa	170 moa	40 moa	50 moa	80 moa	120 moa	60 moa	50 moa	70 moa	70 moa	70 moa	70 moa	70 moa
ELEVATION ADJUSTMENT	31 mil	110 moa	110 moa	110 moa	110 moa	26 mil	80 moa	26 mil	26 mil	250 moa	250 moa	40 moa	50 moa	80 moa	120 moa	60 moa	50 moa	70 moa	70 moa	70 moa	70 moa	70 moa
MAXIMUM CALIBER	UP TO .50 BMG	UP TO .50 BMG	UP TO .50 BMG	UP TO .50 BMG	UP TO .50 BMG	UP TO .338	UP TO .338	UP TO .338	UP TO .338	UP TO .338	UP TO .338	UP TO .500NE	UP TO .500NE	UP TO .500NE	UP TO .500NE	UP TO .500NE	UP TO .500NE	UP TO .500NE	UP TO .500NE	UP TO .500NE	UP TO .500NE	UP TO .500NE
LENGTH	13.77 in / 350 mm	13.77 in / 350 mm	14.05 in / 357 mm	14.05 in / 357 mm	14.05 in / 357 mm	15.67 in / 398 mm	15.67 in / 398 mm	13 in / 331 mm	13 in / 331 mm	10.5 in / 26.4 mm	10.5 in / 26.4 mm	14.1 in / 358 mm	13.7 in / 350 mm	9.64 in / 245 mm	9.64 in / 245 mm	12.7 in / 323 mm	14.3 in / 363 mm	12.26 in / 311.4 mm	12.26 in / 311.4 mm	12.26 in / 311.4 mm	12.26 in / 311.4 mm	11.26 in / 286 mm
TURRET TYPE	LOCKING EXPOSED	LOCKING EXPOSED	LOCKING EXPOSED	LOCKING EXPOSED	LOCKING EXPOSED	LOW-PROFILE LOCKING EXPOSED	LOW-PROFILE LOCKING EXPOSED	LOW-PROFILE LOCKING EXPOSED	LOW-PROFILE LOCKING EXPOSED	LOW-PROFILE LOCKING EXPOSED	LOW-PROFILE LOCKING EXPOSED	LOCKING EXPOSED	LOCKING EXPOSED	LOCKING EXPOSED	POP-UP LOCKING EXPOSED	CAPPED	CAPPED	CAPPED	CAPPED	CAPPED	CAPPED	CAPPED
WEIGHT	33.1 oz / 938.4 g	33.1 oz / 938.4 g	36.2 oz / 1026.3 g	36.2 oz / 1026.3 g	36.2 oz / 1026.3 g	33 oz / 935.5 g	33 oz / 935.5 g	30.8 oz / 873 g	30.8 oz / 873 g	18 oz / 510 g	18 oz / 510 g	29 oz / 459 g	24 oz / 680 g	17 oz / 482 g	16.2 oz / 459 g	25 oz / 708.7 g	16.2 oz / 459 g	14.2 oz / 402.5 g	14.2 oz / 402.5 g	14.2 oz / 402.5 g	14.2 oz / 402.5 g	14 oz / 397 g
BATTERY	CR2032	CR2032	CR2032	CR2032	CR2032	CR2032	CR2032	CR2032	CR2032	CR2032	CR2032	CR2032	CR2032	CR2032	CR2032	CR2032	-	-	-	-	-	-
INCLUDES	SUNSHADE BATTERY	SUNSHADE BATTERY	SUNSHADE BATTERY	SUNSHADE BATTERY	SUNSHADE BATTERY	FLIP-UP COVERS THROW LEVER BATTERY	FLIP-UP COVERS THROW LEVER BATTERY	FLIP-UP COVERS THROW LEVER BATTERY	FLIP-UP COVERS THROW LEVER BATTERY	FLIP-UP COVERS THROW LEVER BATTERY	FLIP-UP COVERS THROW LEVER BATTERY	FLIP-UP COVERS SCOPE RINGS BATTERY	FLIP-UP COVERS SCOPE RINGS BATTERY	FLIP-UP COVERS SCOPE RINGS BATTERY	FLIP-UP COVERS SCOPE RINGS BATTERY	NEOPRENE COVER SCOPE RINGS	NEOPRENE COVER SCOPE RINGS	NEOPRENE COVER SCOPE RINGS	NEOPRENE COVER SCOPE RINGS	NEOPRENE COVER SCOPE RINGS	NEOPRENE COVER SCOPE RINGS	NEOPRENE COVER SCOPE RINGS
RETICLE CALIBRATION	MIL DASH	MOA DOT	MOA DOT	MOA DASH	MOA DASH	MIL DASH	MOA DASH	MIL DASH	MIL DASH	.223 - 55gr	-	MOA DASH	MOA DASH	.223 & .308	.223 - 55/62 gr	-	WHITETAIL CALIBERS	WHITETAIL CALIBERS	350 LEGEND	450 BUSHMASTER	WHITETAIL CALIBERS	-
RETICLE ILLUMINATION	RED / GREEN	RED / GREEN	RED / GREEN	RED / GREEN	RED / GREEN	RED	RED	RED	RED	RED	RED	RED / GREEN	RED / GREEN	RED / GREEN	RED / GREEN	RED	-	-	-	-	-	-
FOCAL PLANE	FIRST	SECOND	SECOND	SECOND	SECOND	FIRST	SECOND	FIRST	FIRST	SECOND	SECOND	SECOND	SECOND	SECOND	SECOND	SECOND	SECOND	SECOND	SECOND	SECOND	SECOND	SECOND
RETICLE	PRS	F-CLASS	F-CLASS	BENCHREST	F-CLASS	LR2	HDR2	LR2	MR2	CR1	HDR	MARKSMAN	MARKSMAN	DUAL CALIBER	AR-223	HUNTER DOT	VENISON HUNTER	VENISON HUNTER	VHR-350L	VHR-450BM	HUNTER BALLISTIC	HOG HUNTER

ULTRA SHOT R-SPEC

REFLEX SIGHTS

RAM Series R-Spec Ultra Shot Sights demonstrate proven performance and reliability in close-quarter, low-light environments with advanced, coated glass; true 1x, parallax-corrected, wide-angle field of view; extended battery life; quick-detach mounting and Sightmark's lifetime warranty. Even better, the addition of an integrated class IIIA laser on specific models enhances accuracy when it matters most.



MAXIMUM CALIBER

FULL METAL CONSTRUCTION

RED OR GREEN RETICLES

QUICK DETACH MOUNT

LARGE OBJECTIVE FOR QUICK ACQUISITION

INCLUDES NEOPRENE COVER


US PATENTS: USD10139197



ULTRA SHOT R-SPEC

ALSO AVAILABLE IN DARK EARTH MODEL: SM26031DE

MAGNIFICATION	OBJECTIVE LENS	AUTO ON/OFF	CONSTRUCTION	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
1x	33 x 24 mm	No/ 1 hr Auto Off	Aluminum Alloy Aluminum Shield	Quick Detach	1 moa	120 moa / 120 moa	4.33 x 2.28 in 110 x 58 mm	10.7 oz 303 g	cr123A up to 2000hrs




RETICLE: 4-PATTERN
MOA
10 BRIGHTNESS SETTINGS
COLOR: ● ●
MODEL: SM26031



ULTRA SHOT R-SPEC DUAL SHOT (WITH RED LASER)

INCLUDES INTEGRATED RED LASER

MAGNIFICATION	OBJECTIVE LENS	AUTO ON/OFF	CONSTRUCTION	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
1x	33 x 24 mm	No/ 1 hr Auto Off	Aluminum Alloy Aluminum Shield	Quick Detach	1 moa	120 moa / 120 moa	4.33 x 2.28 in 110 x 58 mm	10.8 oz 304 g	cr123A up to 2000hrs




RETICLE: 4-PATTERN
MOA
10 BRIGHTNESS SETTINGS
COLOR: ● ●
MODEL: SM26033R



ULTRA SHOT R-SPEC DUAL SHOT (WITH GREEN LASER)

INCLUDES INTEGRATED GREEN LASER

MAGNIFICATION	OBJECTIVE LENS	AUTO ON/OFF	CONSTRUCTION	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
1x	33 x 24 mm	No/ 1 hr Auto Off	Aluminum Alloy Aluminum Shield	Quick Detach	1 moa	120 moa / 120 moa	4.33 x 2.28 in 110 x 58 mm	10.8 oz 304 g	cr123A up to 2000hrs



RETICLE: 4-PATTERN
MOA
10 BRIGHTNESS SETTINGS
COLOR: ● ●
MODEL: SM26033G

REFLEX SIGHTS

ULTRA SHOT

Designed to be the perfect close quarters optic line for demanding LEOs, professional competitors, personal defense enthusiasts and weekend shooters, RAM Series Ultra Shot Reflex Sights promise rock-solid stability, long battery life and a crisp, wide-angle, parallax-corrected field of view.



FULL METAL CONSTRUCTION

PARALLAX FREE RETICLE



RETRACTABLE SUN-SHADE ON M-SPEC MODELS

AUTO SHUT-OFF

LARGE OBJECTIVE FOR QUICK ACQUISITION

INCLUDES NEOPRENE COVER




ULTRA SHOT A-SPEC

MAGNIFICATION	OBJECTIVE LENS	AUTO ON/OFF	CONSTRUCTION	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
1x	33 x 24 mm	No / 1 hr Auto Off	Aluminum Alloy Aluminum Shield	Quick Detach	1 moa	120 moa / 120 moa	4.33 x 2.28 in 110 x 58 mm	10.8 oz 306 g	cr123A up to 2000hrs



ALSO AVAILABLE IN DARK EARTH MODEL: SM26032DE




RETICLE: 4-PATTERN MOA
16 BRIGHTNESS SETTINGS
NIGHT VISION COMPATIBLE
COLOR: ●
MODEL: SM26032

ULTRA SHOT M-SPEC LQD

MAGNIFICATION	OBJECTIVE LENS	AUTO ON/OFF	CONSTRUCTION	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
1x	33 x 24 mm	Motion Sensing / 12hr Auto Off	Magnesium Alloy Aluminum Shield	Locking Quick Detach	1 moa	120 moa / 120 moa	4.01 x 2.32 in 102 x 59 mm	10.2 oz 289 g	cr123A up to 2000hrs



ALSO AVAILABLE IN DARK EARTH MODEL: SM26034DE




RETICLE: CIRCLE DOT CROSSHAIR MOA
16 BRIGHTNESS SETTINGS
NIGHT VISION COMPATIBLE
INTEGRATED SUNSHADE
COLOR: ●
MODEL: SM26034

ULTRA SHOT M-SPEC FMS

MAGNIFICATION	OBJECTIVE LENS	AUTO ON/OFF	CONSTRUCTION	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
1x	33 x 24 mm	Motion Sensing / 12hr Auto Off	Magnesium Alloy Aluminum Shield	Fixed	1 moa	120 moa / 120 moa	4.01 x 2.32 in 102 x 59 mm	9.6 oz 272 g	cr123A up to 2000hrs



ALSO AVAILABLE IN DARK EARTH MODEL: SM26035DE



RETICLE: CIRCLE DOT CROSSHAIR MOA
16 BRIGHTNESS SETTINGS
NIGHT VISION COMPATIBLE
INTEGRATED SUNSHADE
COLOR: ●
MODEL: SM26035



REFLEX SIGHTS

MINI SHOT A-SPEC

Mini Shot A-Specs take shooters to new heights. Excellent for quick-target acquisition and precision, Mini Shot A-Specs work comfortably with pistols, rifles and even shotguns. Whether you're practicing at the range or engaging in self-defense, Mini Shot A-Specs provide the reflexive accuracy that satisfies demanding professionals.



MAXIMUM CALIBER

CLICK ADJUSTMENTS

COMPACT FULL METAL DESIGN



EASY ACCESS BATTERY

AMBIDEXTROUS DIGITAL SWITCHES

MINI SHOT FOOTPRINTS		
M1	M2	M3
DOCTOR/NOBLEX BURRIS	TRIJICON RMR	SHIELD RMS-C




INCLUDED RUBBER COVER



MINI SHOT A-SPEC - M1 (DOCTOR/NOBLEX® FOOTPRINT)

MAGNIFICATION	OBJECTIVE LENS	AUTO ON/OFF	CONSTRUCTION	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT W/O MOUNT	BATTERY
1x	22 x 17 mm	No / No	1 Piece Aluminum Alloy	Fixed	1 moa	110 moa / 110 moa	1.21 x 1.1 in 31 x 28 mm	1.2 oz 34 g	CR1632 up to 160hrs

INCLUDES LOW PROFILE AND RISER MOUNTS




RETICLE: 2 MOA DOT
MOA
10 BRIGHTNESS SETTINGS
COLOR: ●
MODEL: SM26045



MINI SHOT A-SPEC - M3 MICRO (SHIELD RMS-C® FOOTPRINT)

MAGNIFICATION	OBJECTIVE LENS	AUTO ON/OFF	CONSTRUCTION	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT W/O MOUNT	BATTERY
1x	20 x 16 mm	Yes / Yes	1 Piece Aluminum Alloy	Fixed	1 moa	130 moa / 80 moa	1.6 x 0.89 in 40.8 x 22.8 mm	0.7 oz 20 g	CR2032 up to 100000hrs

INCLUDES LOW PROFILE MOUNT



RETICLE: 3 MOA DOT
MOA
AUTO BRIGHTNESS RETICLE
COLOR: ●
MODEL: SM26049


REFLEX SIGHTS

MINI SHOT M-SPEC

Mini Shot M-Specs appeal to law enforcement officers and military personnel for their rapid target acquisition, huge battery life and supreme toughness. With red reticle illumination at 10 brightness levels, windage and elevation click adjustments and protective steel shield, this is the reflex optic professionals need for any challenging situation.



MAXIMUM CALIBER

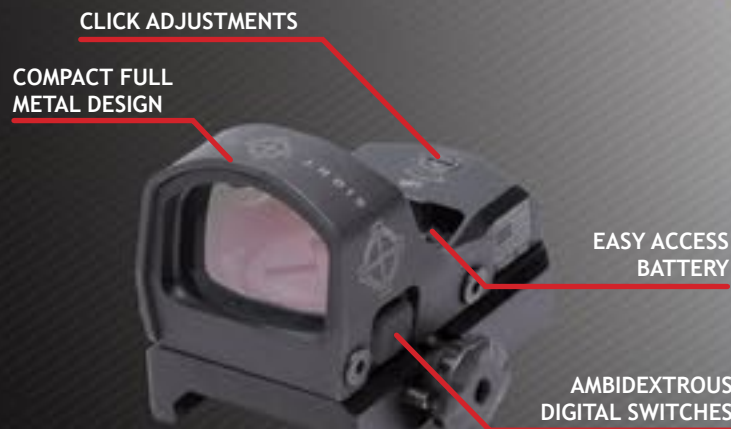


MINI SHOT FOOTPRINTS		
M1	M2	M3
DOCTOR/NOBLEX BURRIS	TRIJICON RMR	SHIELD RMS-C

INCLUDES RUBBER COVER



ALSO AVAILABLE IN DARK EARTH
MODEL: SM26043DE

INCLUDES LOW PROFILE AND RISER MOUNTS



RETICLE: 3 MOA DOT
MOA
10 BRIGHTNESS SETTINGS
COLOR: ●
MODEL: SM26043


MINI SHOT M-SPEC FMS - M1 (DOCTOR/NOBLEX® FOOTPRINT)

MAGNIFICATION	OBJECTIVE LENS	AUTO ON/OFF	CONSTRUCTION	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT W/O MOUNT	BATTERY
1x	21 x 15 mm	No/ 12 hr Auto Off	Aluminum Alloy Steel Shield	Fixed	1 moa	110 moa / 110 moa	1.24 x 1.05 in 31 x 27 mm	1.5 oz 42.5 g	CR1632 up to 3000hrs



ALSO AVAILABLE IN DARK EARTH
MODEL: SM26043-L0DE

INCLUDES LOW PROFILE AND RISER MOUNTS




RETICLE: 3 MOA DOT
MOA
10 BRIGHTNESS SETTINGS
COLOR: ●
MODEL: SM26043-L0D

MINI SHOT M-SPEC LQD - M1 (DOCTOR/NOBLEX FOOTPRINT)

MAGNIFICATION	OBJECTIVE LENS	AUTO ON/OFF	CONSTRUCTION	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT W/O MOUNT	BATTERY
1x	21 x 15 mm	No/ 12 hr Auto Off	Aluminum Alloy Steel Shield	Locking Quick Detach	1 moa	110 moa / 110 moa	1.24 x 1.05 in 31 x 27 mm	1.5 oz 42.5 g	CR1632 up to 3000hrs



INCLUDES LOW PROFILE AND RISER MOUNTS (MOUNTS NOT PICTURED)




RETICLE: 3 MOA DOT
MOA
AUTO BRIGHTNESS SETTINGS
COLOR: ●
MODEL: SM26048

MINI SHOT M-SPEC - M2 SOLAR (TRIJICON®, RMR® FOOTPRINT)

MAGNIFICATION	OBJECTIVE LENS	AUTO ON/OFF	CONSTRUCTION	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT W/O MOUNT	BATTERY
1x	21 x 15 mm	Always On / Dimming	Aluminum	Fixed	1 moa	160 moa / 110 moa	1.77 x 1.26 in 45 x 32 mm	2.5 71 g	CR1632 up to 2hrs



INCLUDES LOW PROFILE



RETICLE: 3 MOA DOT
MOA
AUTO BRIGHTNESS SETTINGS
COLOR: ●
MODEL: SM26050

MINI SHOT M-SPEC - M3 MICRO SOLAR (SHIELD RMS-C® FOOTPRINT)

MAGNIFICATION	OBJECTIVE LENS	AUTO ON/OFF	CONSTRUCTION	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT W/O MOUNT	BATTERY
1x	20 x 15 mm	Always On / Dimming	Aluminum	Fixed	1 moa	90 moa / 60 moa	1.6 x 1.1 in 41 x 28 mm	1.5 42.5 g	CR1632 up to 2hrs

REFLEX SIGHTS

CORE SHOT A-SPEC

Red dot sights are designed to get you on target quickly and keep you there. In low-light environments, it can mean the difference between success and failure. Our red dot sights are built to handle your hard work, day after day, hour after hour, with unfailing reliability.



MAXIMUM CALIBER

WIDE, LOW-PROFILE OBJECTIVE

LOW BATTERY INDICATION



FULL METAL CONSTRUCTION

IDEAL FOR PISTOL ARs & SHOTGUNS


INCLUDES RUBBER COVER



CORE SHOT A-SPEC FMS

MAGNIFICATION	OBJECTIVE LENS	AUTO ON/OFF	CONSTRUCTION	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
1x	28 x 18 mm	No/ 1 hr Auto Off	Aluminum Alloy Aluminum Shield	Fixed	1 moa	100 moa / 100 moa	2.3 x 2.2 in 59 x 56 mm	4.4 oz 125 g	CR2032 up to 1400hrs

INCLUDES LOW PROFILE AND RISER MOUNTS




RETICLE: 5 MOA DOT
MOA
10 BRIGHTNESS SETTINGS
NIGHT VISION COMPATIBLE
COLOR: ●
MODEL: SM26017



CORE SHOT A-SPEC LQD

MAGNIFICATION	OBJECTIVE LENS	AUTO ON/OFF	CONSTRUCTION	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
1x	28 x 18 mm	No/ 1 hr Auto Off	Aluminum Alloy Aluminum Shield	Locking Quick Detach	1 moa	100 moa / 100 moa	2.3 x 2.2 in 59 x 56 mm	4.9 oz 139 g	CR2032 up to 1400hrs

INCLUDES LOW PROFILE AND RISER MOUNTS



RETICLE: 5 MOA DOT
MOA
10 BRIGHTNESS SETTINGS
NIGHT VISION COMPATIBLE
COLOR: ●
MODEL: SM26018

SOLAR

Combining state-of-the-art solar cell technology with proven battery power, our brand new solar red dots feature a dual power system to keep you at the ready anytime, anywhere. Sightmark Solar Series optics also include our innovative Eclipse Light Management System, with auto dimming and brightening, for perfect reticle brightness in any environment.

SOLAR SERIES SIGHTS

.338
MAXIMUM CALIBER

COMPACT, ENCLOSED SIGHT DESIGNS

SOLAR PANEL FOR INFINITE DAYLIGHT USE



FULL METAL CONSTRUCTION


ECLIPSE LIGHT MANAGEMENT SYSTEM



VOLTA SOLAR

MAGNIFICATION	OBJECTIVE LENS	AUTO ON/OFF	CONSTRUCTION	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
1x	28 x 28 mm	No / No	Aluminum Alloy	Fixed	1/2 moa	160 moa / 120 moa	3.23 x 1.98 in 82 x 50 mm	7.3 oz 207 g	2x AAA up to 40000hrs

INCLUDES LOW PROFILE AND RISER MOUNTS




RETICLE: 2 MOA DOT
MOA
10 BRIGHTNESS SETTINGS
ECLIPSE LIGHT MANAGEMENT SYSTEM
COLOR: ●
MODEL: SM26030



MTS MINI SOLAR 1X22

MAGNIFICATION	OBJECTIVE LENS	AUTO ON/OFF	CONSTRUCTION	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
1x	22 mm	No / No	Aluminum Alloy	Fixed	1 moa	160 moa / 120 moa	2.96 x 2.71 in 75 x 69 mm	5.5 oz 156 g	CR2032 up to 20000hrs

INCLUDES LOW PROFILE AND RISER MOUNTS



RETICLE: 3 MOA DOT
MOA
10 BRIGHTNESS SETTINGS
ECLIPSE LIGHT MANAGEMENT SYSTEM
COLOR: ●
MODEL: SM26041

WOLVERINE

Built for speed and reliability, our rubber-armored Wolverine red dot sights feature fixed-magnification, ultra-crisp fields of view and illuminated reticles. Reticle illumination is powered on a single AA battery (50,000 hrs on brightness level 6) and Wolverines are backed by our Sightmark Lifetime Warranty.

RED DOT SIGHTS



MAXIMUM CALIBER

PROTECTED HAND ADJUSTMENTS

ALUMINUM BODY WITH RUBBER ARMOR

USES COMMON AA BATTERY

GREATLY EXTENDED BATTERY LIFE

INCLUDES LENS COVER




WOLVERINE 1X28 FSR

MAGNIFICATION	OBJECTIVE LENS	AUTO ON/OFF	CONSTRUCTION	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
1x	28 mm	No / No	Aluminum with Rubber Shell	Fixed or LQD	1/2 moa	120 moa / 120 moa	4.4 x 2.6 in 113 x 65 mm	12.3 oz 349 g	1x AA up to 1 million hrs

ALSO AVAILABLE IN DARK EARTH
MODEL: SM26020DE




Mount: Fixed



RETICLE: 2 MOA DOT
MOA
10 BRIGHTNESS SETTINGS
NIGHT VISION COMPATIBLE
COLOR: ●
MODEL: SM26020

Mount: LQD



RETICLE: 2 MOA DOT
MOA
10 BRIGHTNESS SETTINGS
NIGHT VISION COMPATIBLE
COLOR: ●
MODEL: SM26020LQD




WOLVERINE 1X23 CSR

MAGNIFICATION	OBJECTIVE LENS	AUTO ON/OFF	CONSTRUCTION	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
1x	23 mm	No / No	Aluminum with Rubber Shell	Fixed or LQD	1 moa	120 moa / 120 moa	3.4 x 2.4 in 87 x 61 mm	10.3 oz 292 g	1x AA up to 1 million hrs

ALSO AVAILABLE IN DARK EARTH
MODEL: SM26021DE




Mount: Fixed



RETICLE: 4 MOA DOT
MOA
10 BRIGHTNESS SETTINGS
NIGHT VISION COMPATIBLE
COLOR: ●
MODEL: SM26021

Mount: LQD



RETICLE: 4 MOA DOT
MOA
10 BRIGHTNESS SETTINGS
NIGHT VISION COMPATIBLE
COLOR: ●
MODEL: SM26021LQD

MTS


The MTS 1x30 is a 2 MOA red dot sight, ideal for use on AR-style rifles, features a clamp mount, reducing bulk and creating a streamlined design. A compact aluminum alloy housing keeps the MTS 1" (2.54cm) shorter than the competition and provides long lasting durability.



MAXIMUM CALIBER

MTS 1X30

MAGNIFICATION	OBJECTIVE LENS	AUTO ON/OFF	CONSTRUCTION	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
1x	30 mm	No / No	Aluminum Alloy	Fixed	1 moa	110 moa / 110 moa	4.4 x 2.9 in 111 x 73 mm	9.8 oz 278 g	CR2032 up to 15000hrs



RETICLE: 2 MOA DOT
MOA
11 BRIGHTNESS SETTINGS
NIGHT VISION COMPATIBLE
COLOR: ●
MODEL: SM26040



SERIES	ULTRA SHOT R-SPEC	ULTRA SHOT R-SPEC	ULTRA SHOT R-SPEC	ULTRA SHOT A-SPEC	ULTRA SHOT M-SPEC LQD	ULTRA SHOT M-SPEC FMS	MINI SHOT A-SPEC M1	MINI SHOT A-SPEC M3	MINI SHOT M-SPEC M1	MINI SHOT M-SPEC M1 LQD	MINI SHOT M-SPEC M2	MINI SHOT M-SPEC M3	CORE SHOT A-SPEC FMS	CORE SHOT A-SPEC LQD	VOLTA SOLAR	MTS MINI SOLAR	WOLVERINE	WOLVERINE	WOLVERINE	WOLVERINE	MTS
MODEL #	SM26031	SM26033R	SM26033G	SM26032	SM26034	SM26035	SM26045	SM26049	SM26043	SM26043-LQD	SM26048	SM26050	SM26017	SM26018	SM26030	SM26041	SM26020	SM26020-LQD	SM26021	SM26021-LQD	SM26040
MAGNIFICATION	1X	1X	1X	1X	1X	1X	1X	1X	1X	1X	1X	1X	1X	1X	1X	1X	1X	1X	1X	1X	1X
OBJECTIVE APERTURE	33 X 24 mm	33 X 24 mm	33 X 24 mm	33 X 24 mm	33 X 24 mm	33 X 24 mm	22 X 17 mm	20 X 16 mm	21 X 15 mm	21 X 15 mm	21 X 15 mm	20 X 15 mm	28 X 18 mm	28 X 18 mm	28 x 28 mm	22 mm	28 mm	28 mm	23 mm	23 mm	30 mm
EYE RELIEF	UNLIMITED	UNLIMITED	UNLIMITED	UNLIMITED	UNLIMITED	UNLIMITED	UNLIMITED	UNLIMITED	UNLIMITED	UNLIMITED	UNLIMITED	UNLIMITED	UNLIMITED	UNLIMITED	UNLIMITED	UNLIMITED	UNLIMITED	UNLIMITED	UNLIMITED	UNLIMITED	UNLIMITED
PARALLAX	PARALLAX-FREE DUAL-GLASS SYSTEM	PARALLAX-FREE DUAL-GLASS SYSTEM	PARALLAX-FREE DUAL-GLASS SYSTEM	PARALLAX-FREE DUAL-GLASS SYSTEM	PARALLAX-FREE DUAL-GLASS SYSTEM	PARALLAX-FREE DUAL-GLASS SYSTEM	PARALLAX-FREE DUAL-GLASS SYSTEM	PARALLAX-FREE DUAL-GLASS SYSTEM	PARALLAX-FREE DUAL-GLASS SYSTEM	PARALLAX-FREE DUAL-GLASS SYSTEM	PARALLAX-FREE DUAL-GLASS SYSTEM	PARALLAX-FREE DUAL-GLASS SYSTEM	PARALLAX-FREE DUAL-GLASS SYSTEM	PARALLAX-FREE DUAL-GLASS SYSTEM	PARALLAX-FREE	PARALLAX-FREE	PARALLAX-FREE DUAL-GLASS SYSTEM	PARALLAX-FREE DUAL-GLASS SYSTEM	PARALLAX-FREE DUAL-GLASS SYSTEM	PARALLAX-FREE DUAL-GLASS SYSTEM	PARALLAX-FREE DUAL-GLASS SYSTEM
ADJUSTMENT VALUE	1 moa	1 moa	1 moa	1 moa	1 moa	1 moa	1 moa	1 moa	1 moa	1 moa	1 moa	1 moa	1 moa	1 moa	1/2 moa	1 moa	1/2 moa	1/2 moa	1/2 moa	1/2 moa	1 moa
WINDAGE ADJUSTMENT	120 moa	120 moa	120 moa	120 moa	120 moa	120 moa	110 moa	130 moa	110 moa	110 moa	160 moa	90 moa	100 moa	100 moa	120 moa	120 moa	120 moa	120 moa	120 moa	120 moa	110 moa
ELEVATION ADJUSTMENT	120 moa	120 moa	120 moa	120 moa	120 moa	120 moa	110 moa	80 moa	110 moa	110 moa	110 moa	60 moa	100 moa	100 moa	160 moa	160 moa	120 moa	120 moa	120 moa	120 moa	110 moa
MAXIMUM CALIBER	UP TO .50 BMG	UP TO .50 BMG	UP TO .50 BMG	UP TO .50 BMG	UP TO .50 BMG	UP TO .50 BMG	UP TO .375 H&H	UP TO .375 H&H	UP TO .308	UP TO .308	UP TO .308	UP TO .308	UP TO .50 CAL	UP TO .50 CAL	UP TO .338 WIN MAG	UP TO .338 WIN MAG	UP TO .375 H&H	UP TO .375 H&H	UP TO .375 H&H	UP TO .375 H&H	UP TO .338 WIN MAG
LENGTH	4.33 in / 110 mm	4.33 in / 110 mm	4.33 in / 110 mm	4.33 in / 110 mm	4.01 in / 102 mm	4.01 in / 102 mm	1.21 in / 31 mm	1.6 in / 40.8 mm	1.24 in / 31.5 mm	1.24 in / 31.5 mm	1.77 in / 45.5 mm	1.6 in / 41 mm	2.3 in / 59 mm	2.3 in / 59 mm	3.23 in / 82 mm	2.96 in / 75 mm	4.4 in / 113 mm	4.4 in / 113 mm	3.4 in / 87 mm	3.4 in / 87 mm	4.4 in / 111 mm
WEIGHT	10.7 oz / 303 g	10.8 oz / 304 g	10.8 oz / 304 g	10.8 oz / 306 g	10.2 oz / 289 g	9.6 oz / 272 g	1.2 oz / 34 g	1.6 oz / 46 g	1.5 oz / 42.5 g	1.5 oz / 42.5 g	2.5 oz / 71 g	1.5 oz / 42.5 g	4.4 oz / 125 g	4.9 oz / 139 g	7.3 oz / 207 g	5.5 oz / 156 g	12.3 oz / 349 g	12.3 oz / 349 g	10.3 oz / 292 g	10.3 oz / 292 g	9.8 oz / 278 g
BATTERY	CR123A	CR123A	CR123A	CR123A	CR123A	CR123A	CR1632	CR2032	CR1632	CR1632	CR1632 / SOLAR	CR1632 / SOLAR	CR1632	CR1632	2x AAA / SOLAR	CR2032 / SOLAR	AA	AA	AA	AA	CR2032
BATTERY LIFE	200 - 2,000 hrs	200 - 2,000 hrs	200 - 2,000 hrs	200 - 2,000 hrs	200 - 2,000 hrs	200 - 2,000 hrs	15 - 160 hrs	500 - 100,000 hrs	300 - 30,000 hrs	300 - 30,000 hrs	? hrs / Infinite	? hrs / Infinite	20 - 1,400 hrs	20 - 1,400 hrs	up to 400,000 hrs / Infinite	up to 200,000 hrs / Infinite	900 - 1,000,000 hrs	900 - 1,000,000 hrs	900 - 1,000,000 hrs	900 - 1,000,000 hrs	100 - 15,000 hrs
SWITCH TYPE	DIGITAL	DIGITAL	DIGITAL	DIGITAL	DIGITAL	DIGITAL	DIGITAL	DIGITAL	DIGITAL	DIGITAL	DIGITAL	DIGITAL	DIGITAL	DIGITAL	DIGITAL	DIGITAL	DIGITAL	DIGITAL	DIGITAL	DIGITAL	DIGITAL
MOUNT TYPE	PICATINNY, QUICK-DETACH	PICATINNY, QUICK-DETACH	PICATINNY, QUICK-DETACH	PICATINNY, QUICK-DETACH	PICATINNY, LOCKING QUICK-DETACH	PICATINNY, FIXED	PICATINNY, FIXED LOW-PROFILE & RISER	PICATINNY, FIXED	PICATINNY, FIXED LOW-PROFILE & RISER	PICATINNY, LOCKING QD LOW-PROFILE & RISER	PICATINNY, FIXED LOW-PROFILE & RISER	PICATINNY, FIXED LOW-PROFILE & RISER	PICATINNY, FIXED	PICATINNY, LOCKING QUICK-DETACH	PICATINNY, FIXED LOW-PROFILE & RISER	PICATINNY, FIXED LOW-PROFILE & RISER	PICATINNY, FIXED	PICATINNY, LOCKING QUICK-DETACH	PICATINNY, FIXED	PICATINNY, LOCKING QUICK-DETACH	PICATINNY, FIXED
INCLUDES	NEOPRENE COVER ADJUSTMENT TOOL BATTERY	NEOPRENE COVER ADJUSTMENT TOOL BATTERY RED LASER	NEOPRENE COVER ADJUSTMENT TOOL BATTERY GREEN LASER	NEOPRENE COVER ADJUSTMENT TOOL BATTERY	NEOPRENE COVER ADJUSTMENT TOOL BATTERY	NEOPRENE COVER ADJUSTMENT TOOL BATTERY	RUBBER COVER LOW PROFILE MOUNT AR RISER MOUNT BATTERY	RUBBER COVER LOW PROFILE MOUNT BATTERY	RUBBER COVER LOW PROFILE MOUNT AR RISER MOUNT BATTERY	RUBBER COVER LOW PROFILE LQD MOUNT AR RISER MOUNT BATTERY	RUBBER COVER LOW PROFILE MOUNT AR RISER MOUNT BATTERY	RUBBER COVER LOW PROFILE MOUNT AR RISER MOUNT BATTERY	RUBBER COVER ADJUSTMENT TOOL BATTERY	RUBBER COVER ADJUSTMENT TOOL BATTERY	RUBBER COVER LOW PROFILE MOUNT AR RISER MOUNT	FLIP-UP LENS COVERS LOW PROFILE MOUNT AR RISER MOUNT	RUBBER LENS COVERS BATTERY	RUBBER LENS COVERS BATTERY	RUBBER LENS COVERS BATTERY	RUBBER LENS COVERS BATTERY	FLIP-UP LENS COVERS BATTERY
RETICLE CALIBRATION	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
RETICLE ILLUMINATION	RED/GREEN	RED/GREEN	RED/GREEN	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED	RED
RETICLE	4 PATTERN	4 PATTERN	4 PATTERN	4 PATTERN	CIRCLE DOT CROSSHAIR	CIRCLE DOT CROSSHAIR	2 MOA DOT	3 MOA DOT	3 MOA DOT	3 MOA DOT	3 MOA DOT	3 MOA DOT	5 MOA DOT	5 MOA DOT	2 MOA DOT	2 MOA DOT	2 MOA DOT	2 MOA DOT	4 MOA DOT	4 MOA DOT	2 MOA DOT
FOOTPRINT	N/A	N/A	N/A	N/A	N/A	N/A	M1 -DOCTOR / NOBLEX	M3 -SHIELD RMS-C	M1 -DOCTOR / NOBLEX	M1 -DOCTOR / NOBLEX	M2 -TRIJICON / RMR	M3 -SHIELD RMS-C	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

MATT BANES



MATT BANES

Matt Banes is a lifelong hunter, military veteran, SWAT officer, business entrepreneur and all-around outdoorsman extraordinaire. When he speaks on matters of hunting, shooting and wildlife conservation, everyone with a shred of wisdom takes heed.

Born into the hunting world, Matt would use pellet rifles to shoot water snakes behind his childhood home in rural Texas. In his teens, he used pistols, rifles and shotguns to harvest game from the nearby woodlands. He didn't know it then, but he was unconsciously absorbing data about angles, windage, elevation and holdovers.

He carried that knowledge into his United States Coast Guard career, collecting long guns and pistols while he toured the Texas Coast with his teammates. Matt hunted ducks, hogs, deer, rabbit and squirrels throughout America's southeastern swamplands, once eliminating 48 feral pigs in one night! According to Matt, he's eradicated feral pigs with trained dogs, from horseback, on boats and even helicopters!

Currently an advanced firearms and tactical instructor, Matt coordinates veteran and law enforcement hunts, develops products for Sightmark and provides subject matter expertise on all facets of the outdoors industry. Concerning the future, Matt expects people to flee urban areas and reconnect with their hunting roots.

He expects new and veteran hunters to carry on the legacy that he's spent so many years living and advocating. For shooters of all ages and skill levels, Matt is confident Sightmark can help you Make Your Mark.



MAGNIFIER

Designed for use with red dot sights, Sightmark 3x, 5x and 7x magnifiers employ Picatinny rail compatible flip-to-side mounts for rapid transitions between CQB and mid-range engagements.

MAGNIFIERS



T-5 TACTICAL MAGNIFIER

MAGNIFICATION X OBJECTIVE LENS	TUBE DIAMETER	EYE RELIEF	FIELD OF VIEW @100 YDS/M	EXIT PUPIL DIAMETER	MOUNT TYPE	ALIGNMENT ADJUSTMENT	DIMENSIONS	WEIGHT	FLIP-TO-SIDE
5 x 23 mm	30 mm	2.25 in 57 mm	29.6 ft 9.8 m	4.6 mm	Locking Quick Detach	External	4.72 x 1.67 in 120 x 42.5 mm	10.9 oz 309 g	Yes



FLIP-TO-SIDE LQD MOUNT
MODEL: SM19064



T-3 TACTICAL MAGNIFIER

MAGNIFICATION X OBJECTIVE LENS	TUBE DIAMETER	EYE RELIEF	FIELD OF VIEW @100 YDS/M	EXIT PUPIL DIAMETER	MOUNT TYPE	ALIGNMENT ADJUSTMENT	DIMENSIONS	WEIGHT	FLIP-TO-SIDE
3 x 23 mm	30 mm	2.25 in 57 mm	43.3 ft 14.4 m	7.6 mm	Locking Quick Detach	External	4 x 1.67 in 103 x 42.5 mm	10.6 oz 300.5 g	Yes



FLIP-TO-SIDE LQD MOUNT
MODEL: SM19063

LATITUDE

SPOTTING SCOPES

Whether you're glassing mule deer in Wyoming or spotting for someone at the range, Latitude spotting scopes feature powerful magnification ranges and crisp fields of view, perfect for reading mirage, making wind calls and identifying extreme-distance impacts. The Latitude Tactical model includes a first-focal-plane mil-dash reticle with dedicated focus.




CASE
LENS COVERS
ACCESSORY RAILS



LATITUDE 20-60X80 XD

MAGNIFICATION X OBJECTIVE LENS	CLOSE FOCUS DISTANCE	EYE RELIEF	FIELD OF VIEW @1000 YDS/M	EXIT PUPIL DIAMETER	OPTICAL TYPE	TWILIGHT INDEX	DIMENSIONS	WEIGHT	RESOLUTION
20-60 x 80 mm	39 ft 12 m	1.06 - 1.02 in 27 - 26 mm	131.1 - 43.3 ft 43.7 - 14.5 m	4.1 - 1.3 mm	Mirror Dielectric	40 - 69.3	15.5 x 5.75 in 394 x 146 mm	67.7 oz 1919 g	2.2"



RETICLE: TACTICAL MIL
MIL COLOR:
MODEL: SM11034TD




RETICLE: NONE
MODEL: SM11034

20-60X



LATITUDE 15-45X60

MAGNIFICATION X OBJECTIVE LENS	CLOSE FOCUS DISTANCE	EYE RELIEF	FIELD OF VIEW @1000 YDS/M	EXIT PUPIL DIAMETER	OPTICAL TYPE	TWILIGHT INDEX	DIMENSIONS	WEIGHT	RESOLUTION
15-45 x 60 mm	27 ft 8 m	1.06 - 1.02 in 27 - 26 mm	177 - 60 ft 59 - 20 m	4.2 - 1.3 mm	Mirror Dielectric	30 - 52	11 x 5.75 in 279 x 145 mm	45.7 oz 1295 g	2.8"



RETICLE: TACTICAL MIL
MIL COLOR:
MODEL: SM11033TD



RETICLE: NONE
MODEL: SM11033

15-45X

SOLITUDE

Whether you're spotting for a friend or glassing for wildlife across an expansive draw on the hunt of a lifetime, Solitude spotting scopes boast pristine clarity, robust magnification ranges, oversized objective lenses and a porro prism optical system.

SPOTTING SCOPES



STRAIGHT EYE-PIECE DESIGN

PORRO PRISM OPTICAL SYSTEM

BUILT-IN TRIPOD ADAPTER

OPTIONAL INTEGRATED SUNSHADE



OPTIONAL
TABLETOP TRIPOD
LENS COVER
CASE

SOLITUDE 20-60X80 SE

MAGNIFICATION X OBJECTIVE LENS	CLOSE FOCUS DISTANCE	EYE RELIEF	FIELD OF VIEW @1000 YDS/M	EXIT PUPIL DIAMETER	OPTICAL TYPE	TWILIGHT INDEX	DIMENSIONS	WEIGHT	RESOLUTION
20-60 x 80 mm	20 ft 6.1 m	0.63 - 0.55 in 16 - 14 mm	94.3 - 47.1 ft 31.4 - 15.7 m	4 - 1.3 mm	Porro Prism	40 - 69.3	17.7 x 4.7 in 450 x 119.4 mm	50.5 oz 1431.6 g	2.3"

20-60X

RETICLE: NONE
MODEL: SM11032K

SOLITUDE 20-60X60 SE

MAGNIFICATION X OBJECTIVE LENS	CLOSE FOCUS DISTANCE	EYE RELIEF	FIELD OF VIEW @1000 YDS/M	EXIT PUPIL DIAMETER	OPTICAL TYPE	TWILIGHT INDEX	DIMENSIONS	WEIGHT	RESOLUTION
20-60 x 60 mm	14 ft 4.26 m	0.6 - 0.55 in 15.2 - 14 mm	107.4 - 52.5 ft 35.8 - 17.5 m	3 - 1 mm	Porro Prism	34.6 - 60	13.9 x 4.7 in 353 x 119.4 mm	36.6 oz 1037.6 g	2.7"

20-60X

RETICLE: NONE
MODEL: SM11031K

SOLITUDE 11-33X50 SE

MAGNIFICATION X OBJECTIVE LENS	CLOSE FOCUS DISTANCE	EYE RELIEF	FIELD OF VIEW @1000 YDS/M	EXIT PUPIL DIAMETER	OPTICAL TYPE	TWILIGHT INDEX	DIMENSIONS	WEIGHT	RESOLUTION
11 - 33 x 50 mm	7.5 ft 2.3 m	0.56 - 0.47 in 15 - 11.9 mm	157.2 - 77.1 ft 52.4 - 25.7 m	4.5 - 1.5 mm	Porro Prism	23.4 - 40.6	11.2 x 4.7 in 284.5 x 119.4 mm	22.5 oz 637.8 g	2.3"

11-33X

RETICLE: NONE
MODEL: SM11030K

BINOCULARS

SOLITUDE XD

Whether you're surveying wildlife, hunting whitetail or taking in your favorite sports team from the stands, the durable magnesium alloy, rubber-armored housing and extra-low dispersion glass found on Solitude XDs bring your outdoor views into crystal-clear focus.

MAGNESIUM ALLOY HOUSING WITH RUBBER ARMOR

FULLY MULTI-COATED OPTICS

PHASE CORRECTIVE PRISM COATINGS

EXTRA LOW DISPERSION XD GLASS

INCLUDES CASE LENS COVERS NECK STRAP



SOLITUDE 10X42 XD

MAGNIFICATION X OBJECTIVE LENS	CLOSE FOCUS DISTANCE	EYE RELIEF	FIELD OF VIEW @1000 YDS/M	EXIT PUPIL DIAMETER	OPTICAL TYPE	TWILIGHT INDEX	DIMENSIONS	WEIGHT	RESOLUTION
10 x 42 mm	6.6 ft 2 m	0.6 in 15 mm	340 ft 113 m	4.27 mm	BAK-4 Roof Prisms	20.2	6.7 x 2 in 170 x 51 mm	26.7 oz 757 g	4"



10X

RETICLE: NONE
MODEL: SM12103

SOLITUDE 8X42 XD

MAGNIFICATION X OBJECTIVE LENS	CLOSE FOCUS DISTANCE	EYE RELIEF	FIELD OF VIEW @1000 YDS/M	EXIT PUPIL DIAMETER	OPTICAL TYPE	TWILIGHT INDEX	DIMENSIONS	WEIGHT	RESOLUTION
8 x 42 mm	6.6 ft 2 m	0.65 in 16.6 mm	426 ft 142 m	5.2 mm	BAK-4 Roof Prisms	17.8	6.7 x 2 in 170 x 51 mm	26.7 oz 757 g	4"



8X

RETICLE: NONE
MODEL: SM12102

SOLITUDE 7X36 XD

MAGNIFICATION X OBJECTIVE LENS	CLOSE FOCUS DISTANCE	EYE RELIEF	FIELD OF VIEW @1000 YDS/M	EXIT PUPIL DIAMETER	OPTICAL TYPE	TWILIGHT INDEX	DIMENSIONS	WEIGHT	RESOLUTION
7 x 36 mm	5.9 ft 1.8 m	0.67 in 16.8 mm	477 ft 159 m	5.1 mm	BAK-4 Roof Prisms	15.8	5.9 x 2 in 149.8 x 50.8 mm	23.7 oz 672 g	4.3"



7X

RETICLE: NONE
MODEL: SM12101

SOLITUDE

BINOCULARS

Out in the field you need optics you can depend on. Our binoculars offer wide, sharp fields of view, practical magnification options and a long-lasting aluminum housing with rubber-armor coating, getting you closer to the action season after season.

ALUMINUM HOUSING

COMPACT AND PORTABLE

RUBBER ARMOR

INCLUDES:
CASE
LENS COVERS
NECK STRAP



12X

RETICLE: NONE
MODEL: SM12004

SOLITUDE 12X50

MAGNIFICATION X OBJECTIVE LENS	CLOSE FOCUS DISTANCE	EYE RELIEF	FIELD OF VIEW @1000 YDS/M	EXIT PUPIL DIAMETER	OPTICAL TYPE	TWILIGHT INDEX	DIMENSIONS	WEIGHT	RESOLUTION
12 x 50 mm	13.1 ft 4 m	0.72 in 18.2 mm	241 ft 80 m	4.1 mm	BAK-4 Roof Prisms	21.47	6.5 x 2.3 in 165 x 58 mm	31.7 oz 898.6 g	4.2"



SOLITUDE 10X42

MAGNIFICATION X OBJECTIVE LENS	CLOSE FOCUS DISTANCE	EYE RELIEF	FIELD OF VIEW @1000 YDS/M	EXIT PUPIL DIAMETER	OPTICAL TYPE	TWILIGHT INDEX	DIMENSIONS	WEIGHT	RESOLUTION
10 x 42 mm	13.1 ft 4 m	0.72 in 18.2 mm	304 ft 101 m	4.2 mm	BAK-4 Roof Prisms	20.42	5.9 x 2 in 150 x 51 mm	26.7 oz 757 g	5.33"



10X

RETICLE: NONE
MODEL: SM12003



8X

RETICLE: NONE
MODEL: SM12002

SOLITUDE 8X42

MAGNIFICATION X OBJECTIVE LENS	CLOSE FOCUS DISTANCE	EYE RELIEF	FIELD OF VIEW @1000 YDS/M	EXIT PUPIL DIAMETER	OPTICAL TYPE	TWILIGHT INDEX	DIMENSIONS	WEIGHT	RESOLUTION
8 x 42 mm	13.1 ft 4 m	0.78 in 19.8 mm	341 ft 103.9 m	4.1 mm	BAK-4 Roof Prisms	18.24	5.9 x 2 in 150 x 51 mm	26.7 oz 757 g	5.33"



8X

RETICLE: NONE
MODEL: SM12001

SOLITUDE 8X32

MAGNIFICATION X OBJECTIVE LENS	CLOSE FOCUS DISTANCE	EYE RELIEF	FIELD OF VIEW @1000 YDS/M	EXIT PUPIL DIAMETER	OPTICAL TYPE	TWILIGHT INDEX	DIMENSIONS	WEIGHT	RESOLUTION
8 x 32 mm	6.5 ft 2 m	0.58 in 14.7 mm	426 ft 142 m	4.1 mm	BAK-4 Roof Prisms	16.19	4.3 x 1.8 in 110 x 45 mm	23.5 oz 666 g	5.7"

LO PRO

Sightmark weapon-mounted laser/light systems shed disorienting light and enhance accuracy in low-light environments while long battery life and our lifetime warranty ensure the kind of reliability you demand.

LASER/LIGHT SIGHTS

LOW PROFILE DESIGN

WINDAGE/ELEVATION LASER ADJUSTMENTS

AMBIDEXTROUS OPERATION

INCLUDES PRESSURE PAD



LOPRO COMBO

LASER TYPE	LASER RANGE	FLASH LIGHT TYPE	IR ILLUMINATOR TYPE	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
Green 520 Nm	up to 600 yds up to 550 m	White LED 300 Lumens	810 Nm LED 1800 mW	Fixed	1 moa	200 moa / 200 moa	4.49 x 1.53 in 114 x 38.9 mm	13.2 oz 374 g	cr123a up to 18 hrs

ALSO AVAILABLE IN DARK EARTH MODEL: SM25013DE

PLATFORM WORKS WITH MINI SHOT MSPEC AND M1 SIGHTS

PROFILE: LOW INCLUDES: LASER, LIGHT AND IR ILLUMINATOR LASER COLOR: GREEN MODEL: SM25013

LOPRO MINI COMBO

LASER TYPE	LASER RANGE	FLASH LIGHT TYPE	IR ILLUMINATOR TYPE	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
Green 520 Nm	up to 600 yds up to 550 m	White LED 300 Lumens		Fixed	1 moa	200 moa / 200 moa	3.5 X 1.4 in 88 X 36 mm	7 oz 198.4 g	cr123A up to 18hrs

ALSO AVAILABLE IN DARK EARTH MODEL: SM25012DE

LOPRO MINI

LASER TYPE	LASER RANGE	FLASH LIGHT TYPE	IR ILLUMINATOR TYPE	MOUNT TYPE	ADJUSTMENT VALUE	WIND/ELEV. ADJUSTMENT	DIMENSIONS	WEIGHT	BATTERY
Green 520 Nm	up to 600 yds up to 550 m			Fixed	1 moa	200 moa / 200 moa	2.6 X 1.4 in 66 X 36 mm	6.7 oz 190 g	cr123A up to 18hrs

ALSO AVAILABLE IN DARK EARTH MODEL: SM25016DE


PROFILE: LOW INCLUDES: LASER LASER COLOR: GREEN MODEL: SM25016



ACCUDOT

Accudot Boresights do much more than help you get on target quickly with in-chamber, laser precision. Accudot Boresights eliminate battery changes with the use of an internal, rechargeable battery. Save more on batteries and ammo than you'll ever spend on an Accudot!

LASER BORESIGHTS

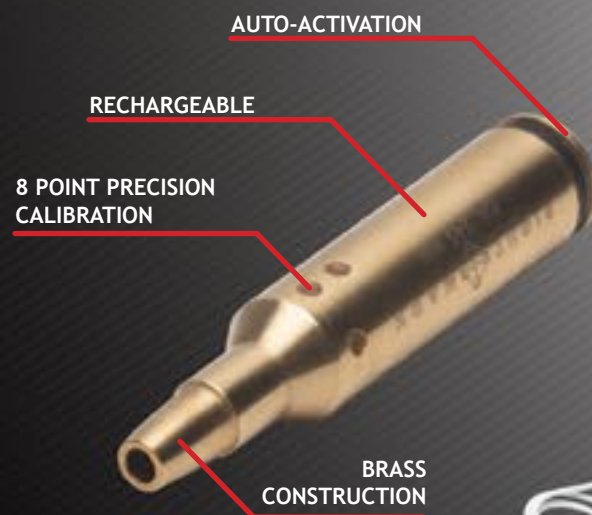

RECHARGING DOCK
USB CABLE
WALL ADAPTER
CARRYING CASE



ACCUDOT RIFLE BORESIGHTS

LASER TYPE	LASER RANGE	LASER WAVELENGTH	DOT SIZE @ 100 YDS/M	BORESIGHT TYPE	MATERIAL	AUTO-ACTIVATED	OPERATION	BATTERY TYPE	BATTERY LIFE
Red 632 - 650 Nm	up to 100 yds up to 91.4 m	<5 mW	2 in 50.8 mm	In-Chamber	Brass	Yes	Auto-Activation	Internal Rechargeable	up to 1 hr



- 223 .556 NATO MODEL: SM39050
- .243 .308 7.62X51 MODEL: SM39051
- .30-06 .270 .25-06 MODEL: SM39053

ACCUDOT PISTOL BORESIGHTS

LASER TYPE	LASER RANGE	LASER WAVELENGTH	DOT SIZE @ 100 YDS/M	BORESIGHT TYPE	MATERIAL	AUTO-ACTIVATED	OPERATION	BATTERY TYPE	BATTERY LIFE
Red 632 - 650 Nm	up to 100 yds up to 91.4 m	<5 mW	2 in 50.8 mm	In-Chamber	Brass	Yes	Auto-Activation	Internal Rechargeable	up to 1 hr



9MM LUGER MODEL: SM39052

ACCUDOT SHOTGUN BORESIGHTS

LASER TYPE	LASER RANGE	LASER WAVELENGTH	DOT SIZE @ 100 YDS/M	BORESIGHT TYPE	MATERIAL	AUTO-ACTIVATED	OPERATION	BATTERY TYPE	BATTERY LIFE
Red 632 - 650 Nm	up to 100 yds up to 91.4 m	<5 mW	2 in 50.8 mm	In-Chamber	Brass	Yes	Auto-Activation	Internal Rechargeable	up to 1 hr



12 GAUGE MODEL: SM39054

BORESIGHT

Sighting-in a new scope or double-checking zero on your favorite rifles, handguns and crossbows? Sightmark boresights are the first, best name in boresighting tools. From universal barrel-mounted to caliber-specific in-chamber products, our boresights are designed to get you on target quickly without wasting ammo.

LASER BORESHIGHTS

8 POINT PRECISION CALIBRATION

BRASS CONSTRUCTION

INCLUDED CARRYING CASE



RIFLE BORESIGHTS

LASER TYPE	LASER RANGE	DOT SIZE @ 100 YDS/M	BORESIGHT TYPE	MATERIAL	AUTO-ACTIVATED	OPERATION	BATTERY TYPE	BATTERY LIFE
Red 632 - 650 Nm	up to 100 yds up to 91.4 m	2 in 50.8 mm	In-Chamber	Brass	No	Batteries Inserted	2x AG5	up to 1 hr



PISTOL BORESIGHTS

LASER TYPE	LASER RANGE	DOT SIZE @ 100 YDS/M	BORESIGHT TYPE	MATERIAL	AUTO-ACTIVATED	OPERATION	BATTERY TYPE	BATTERY LIFE
Red 632 - 650 Nm	up to 100 yds up to 91.4 m	2 in 50.8 mm	In-Chamber	Brass	No	Batteries Inserted	2x AG5	up to 1 hr



SPECIALTY BORESIGHTS

LASER TYPE	LASER RANGE	DOT SIZE @ 100 YDS/M	BORESIGHT TYPE	MATERIAL	AUTO-ACTIVATED	OPERATION	BATTERY TYPE	BATTERY LIFE
Red or Green	up to 100 yds up to 91.4 m	2 in 50.8 mm	In-Chamber	Brass	No	Batteries Inserted or Push Button	Varies	up to 1 hr



UNIVERSAL BORESIGHTS

LASER TYPE	LASER RANGE	DOT SIZE @ 100 YDS/M	BORESIGHT TYPE	MATERIAL	AUTO-ACTIVATED	OPERATION	BATTERY TYPE	BATTERY LIFE
Red or Green	up to 100 yds up to 91.4 m	2 in 50.8 mm	In-Chamber	Brass	No	Push Button	2x AG5	up to 1 hr



ACCESSORY

At Sightmark, "Make Your Mark" means more than optics and point of impact. We offer an array of accessories, from scope rings and covers to data books, all to enhance your shooting and overall outdoor experiences.



HOW TO PICK TACTICAL RING SIZE

OBJECTIVE SIZE	TRADITIONAL GUN	SEMI-AUTO MSR
20-25MM	LOW	EXTRA HIGH
26-30MM	LOW	EXTRA HIGH
31-35MM	LOW	EXTRA HIGH
36-40MM	LOW - MEDIUM	EXTRA HIGH
41-45MM	MEDIUM	EXTRA HIGH
46-50MM	MEDIUM - HIGH	EXTRA HIGH
51-55MM	HIGH	EXTRA HIGH
56-60MM	HIGH - EXTRA HIGH	EXTRA HIGH

RING SIZE: 30 MM
MODEL: SM19044



RING SIZE: 34 MM
MODEL: SM19045

BUBBLE LEVEL RINGS

RING DIAMETER	BUBBLE LEVEL	SINGLE BOLT MOUNTING	TORQUE SPEC RINGS	MATERIAL
30 mm or 34mm	Yes	Yes	10 - 12 in-lb 1.1 - 1.4 N.m	Aluminum

HEIGHT: LOW
MODEL: SM04005

HEIGHT: MEDIUM
MODEL: SM04006

HEIGHT: HIGH
MODEL: SM04007

HEIGHT: EXTRA HIGH
MODEL: SM04008



TACTICAL RINGS

RING DIAMETER	RING HEIGHT	TORQUE SPEC HEX	TORQUE SPEC RINGS	MATERIAL
30 mm & 1 in	Low, Med, High Extra High	120 - 140 in-lb 13.5 - 15.8 N.m	19 - 22 in-lb 2.1 - 2.5 N.m	6061-T6 Aluminum

MOUNT: PICATINNY FIXED
MODEL: SM28004



QUICK DETACH MINI BATTERY PACK

WORKS WITH	MOUNT TYPE	CAPACITY	BATTERY TYPE	OUTPUT CONNECTION
Wraith HD and Wraith 4K models	Tool Less Picatinny QD	6,000 mAh	Rechargeable Lithium-Polymer	Universal USB Type A

MOUNT: PICATINNY QD
MODEL: SM38001



QUICK DETACH BATTERY PACK

WORKS WITH	MOUNT TYPE	CAPACITY	BATTERY TYPE	OUTPUT CONNECTION
Wraith HD and Wraith 4K models	Tool Less Picatinny QD	10,000 mAh	Rechargeable Lithium-Polymer	Universal USB Type A



SLOPE: NONE
MODEL: SM34019

SLOPE: 20 MOA
MODEL: SM34021

FIXED CANTILEVER MOUNTS

RING DIAMETER	CENTERLINE HEIGHT	TORQUE SPEC HEX	TORQUE SPEC RINGS	MATERIAL
30 mm & 1 in	1.5 in 38.1 mm	40 - 50 in-lb 4.5 - 5.6 N.m	22 - 25 in-lb 3.4 - 3.8 N.m	6061-T6 Aluminum



SLOPE: NONE
MODEL: SM34020

LQD CANTILEVER MOUNTS

RING DIAMETER	CENTERLINE HEIGHT	TORQUE SPEC HEX	TORQUE SPEC RINGS	MATERIAL
30 mm & 1 in	1.5 in 38.1 mm	40 - 50 in-lb 4.5 - 5.6 N.m	22 - 25 in-lb 3.4 - 3.8 N.m	6061-T6 Aluminum



SLOPE: NONE
MODEL: SM34022

SLOPE: 20 MOA
MODEL: SM34024

FIXED CANTILEVER MOUNTS

RING DIAMETER	CENTERLINE HEIGHT	TORQUE SPEC HEX	TORQUE SPEC RINGS	MATERIAL
34 mm	1.5 in 38.1 mm	40 - 50 in-lb 4.5 - 5.6 N.m	22 - 25 in-lb 3.4 - 3.8 N.m	6061-T6 Aluminum



SLOPE: NONE
MODEL: SM34023

LQD CANTILEVER MOUNTS

RING DIAMETER	CENTERLINE HEIGHT	TORQUE SPEC HEX	TORQUE SPEC RINGS	MATERIAL
34 mm	1.5 in 38.1 mm	40 - 50 in-lb 4.5 - 5.6 N.m	22 - 25 in-lb 3.4 - 3.8 N.m	6061-T6 Aluminum

SIGHT MARK[®]

www.sightmark.com

North and South America
2201 Heritage Parkway
Mansfield, TX 76063
817.225.0310
sales@sightmark.com



Europe, Middle East, Africa
94 Iliyantsi Blvd
Area PA Iliyantsi - East
1271 Sofia, Bulgaria
+359 2 434 3287
sales@sellmarkeu.net